

# Hi-MO **5m**

## LR5-72HPH 525~550M

- Based on M10-182mm wafer, best choice for ultra-large power plants
- Advanced module technology delivers superior module efficiency
  - M10 Gallium-doped Wafer
  - Smart Soldering
  - 9-busbar Half-cut Cell
- Excellent outdoor power generation performance
- High module quality ensures long-term reliability

12

12-year Warranty for Materials and Processing

25

25-year Warranty for Extra Linear Power Output

### Complete System and Product Certifications

IEC 61215, IEC 61730, UL 61730

ISO 9001:2008: ISO Quality Management System

ISO 14001:2004: ISO Environment Management System

TS62941: Guideline for module design qualification and type approval

OHSAS 18001: 2007 Occupational Health and Safety

# LONGI



**21.5%**  
MAX MODULE  
EFFICIENCY



**0~+5W**  
POWER  
TOLERANCE

**<2%**  
FIRST YEAR  
POWER DEGRADATION

**0.55%**  
YEAR 2-25  
POWER DEGRADATION


**HALF-CELL**  
Lower operating temperature

## Additional Value

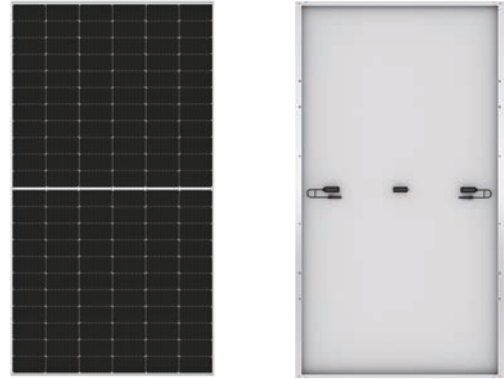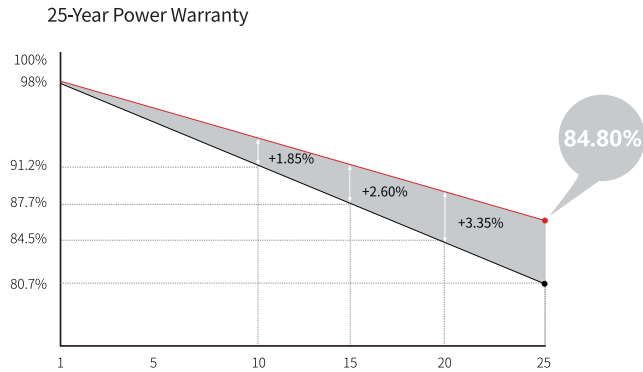

## Mechanical Parameters

|                  |   |
|------------------|---|
| Cell Orientation | 144 (6×24)  |
| Junction Box     | IP68, three diodes  |
| Output Cable     | 4mm <sup>2</sup> , positive 400 / negative 200mm length can be customized |
| Glass            | Single glass, 3.2mm coated tempered glass                                 |
| Frame            | Anodized aluminum alloy frame   |
| Weight           | 27.2kg  |
| Dimension        | 2256×1133×35mm  |
| Packaging        | 31pcs per pallet / 155pcs per 20' GP / 620pcs per 40' HC                  |

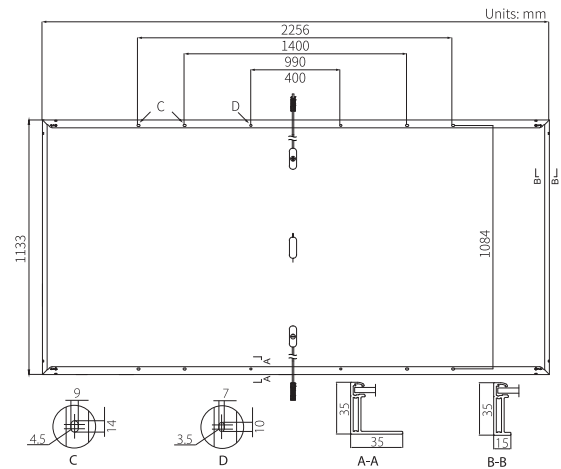

## Electrical Characteristics

STC : AM1.5 1000W/m<sup>2</sup> 25°C Test uncertainty for Pmax: ±3%

|                                  | 525   | 530   | 535   | 540   | 545   | 550   |
|----------------------------------|-------|-------|-------|-------|-------|-------|
| Power Class                      | 525   | 530   | 535   | 540   | 545   | 550   |
| Maximum Power (Pmax/W)           | 525   | 530   | 535   | 540   | 545   | 550   |
| Open Circuit Voltage (Voc/V)     | 49.05 | 49.20 | 49.35 | 49.50 | 49.65 | 49.80 |
| Short Circuit Current (Isc/A)    | 13.65 | 13.71 | 13.78 | 13.85 | 13.92 | 13.98 |
| Voltage at Maximum Power (Vmp/V) | 41.20 | 41.35 | 41.50 | 41.65 | 41.80 | 41.95 |
| Current at Maximum Power (Imp/A) | 12.75 | 12.82 | 12.90 | 12.97 | 13.04 | 13.12 |
| Module Efficiency(%)             | 20.5  | 20.7  | 20.9  | 21.1  | 21.3  | 21.5  |

## Operating Parameters

|                                    |                  |
|------------------------------------|------------------|
| Operational Temperature            | -40°C ~ +85°C    |
| Power Output Tolerance             | 0 ~ +5 W         |
| Voc and Isc Tolerance              | ±3%              |
| Maximum System Voltage             | DC1500V (IEC/UL) |
| Maximum Series Fuse Rating         | 25A              |
| Nominal Operating Cell Temperature | 45±2°C           |
| Protection Class                   | Class II         |
| Fire Rating                        | UL type 1 or 2   |

## Mechanical Loading

|                                   |                                      |
|-----------------------------------|--------------------------------------|
| Front Side Maximum Static Loading | 5400Pa                               |
| Rear Side Maximum Static Loading  | 2400Pa                               |
| Hailstone Test                    | 25mm Hailstone at the speed of 23m/s |

## Temperature Ratings (STC)

|                                 |            |
|---------------------------------|------------|
| Temperature Coefficient of Isc  | +0.048%/°C |
| Temperature Coefficient of Voc  | -0.270%/°C |
| Temperature Coefficient of Pmax | -0.350%/°C |