


# somera

MONO CRYSTALLINE SOLAR PV MODULES

  
**vikramsolar**  
CREATING CLIMATE FOR CHANGE

SOMERA VSM.72.AAA.05 | MONOCRYSTALLINE SOLAR PV MODULES | 72 CELLS | 340-365 WATT

# ALL NEW 72 CELLS MONO SOMERA GRAND ULTIMA SILVER 1500V SERIES

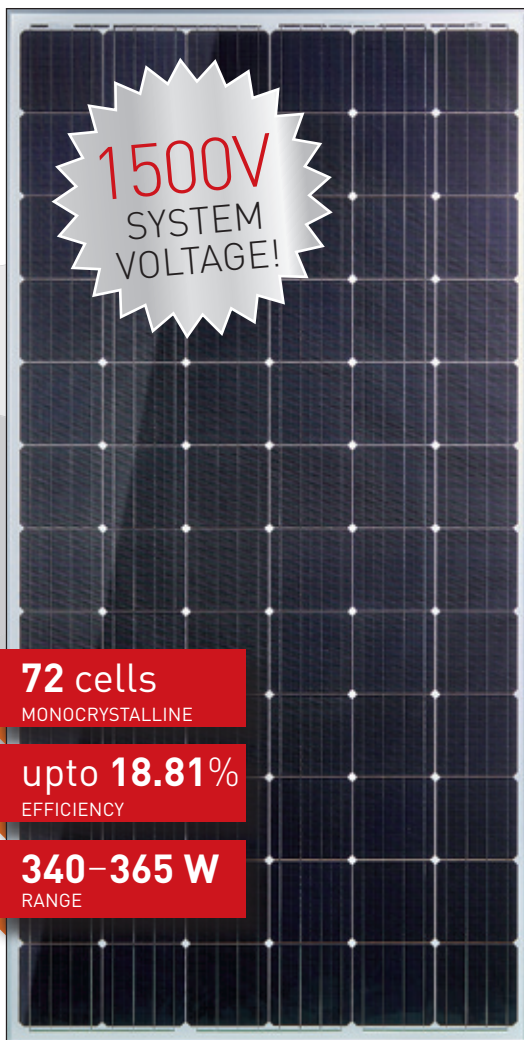

**10% HIGHER POWER OUTPUT** compared to industry average poly crystalline module



Extremely **LOW LIGHT-INDUCED DEGRADATION** on account of special passivation process



Extremely **NARROW POWER BINNING TOLERANCE** of +2.5 Wp to reduce current mismatch loss in single string



Engineered to provide **EXCELLENT LOW LIGHT** and **LONGER WAVELENGTH RESPONSE**



**EXTREMELY RELIABLE PRODUCT** suiting harsh environment conditions withstanding 2400Pa Wind load, 5400Pa Snow load and Dynamic Wind load



Using highly efficient **PASSIVATED EMITTER REAR CONTACT TECHNOLOGY (PERC)** cells



## QUALITY AND SAFETY

- ◆ 27 years of linear power output warranty \*\*
- ◆ Rigorous quality control meeting the highest international standards
- ◆ 100% EL tested to ensure micro crack free modules
- ◆ Certified for PID resistance

- ◆ Certified for salt mist corrosion resistance – severity VI
- ◆ Certified for ammonia resistance
- ◆ 3rd Party PAN file validated\*

## APPLICATIONS

- ◆ On-grid large scale utility systems
- ◆ On-grid rooftop residential and commercial systems
- ◆ Off-grid residential systems

# TECHNICAL DATA

## SOMERA GRAND ULTIMA SILVER 1500V SERIES

THIS DATASHEET IS APPLICABLE FOR: SOMERA VSM.72.AAA.05 (AAA=340-365)

### Electrical Data<sup>1</sup> All data refers to STC

Parameter	340.0	342.5	345.0	347.5	350.0	352.5	355.0	357.5	360.0	362.5	365.0
Peak Power $P_{max}$ (Wp)	340.0	342.5	345.0	347.5	350.0	352.5	355.0	357.5	360.0	362.5	365.0
Maximum Voltage $V_{mpp}$ (V)	37.98	38.02	38.06	38.10	38.14	38.17	38.21	38.24	38.29	38.32	38.36
Maximum Current $I_{mpp}$ (A)	8.95	9.01	9.06	9.12	9.18	9.24	9.29	9.35	9.41	9.46	9.52
Open Circuit Voltage $V_{oc}$ (V)	47.1	47.1	47.2	47.3	47.4	47.4	47.5	47.6	47.7	47.7	47.8
Short Circuit Current $I_{sc}$ (A)	9.42	9.49	9.56	9.63	9.70	9.76	9.83	9.90	9.97	10.04	10.10
Module Efficiency $\eta$ (%)	17.52	17.65	17.78	17.91	18.04	18.17	18.3	18.42	18.55	18.68	18.81

<sup>1</sup> STC: 1000 W/m<sup>2</sup> irradiance, 25°C cell temperature, AM1.5g spectrum according to EN 60904-3. Average relative efficiency reduction of 5% at 200 W/m<sup>2</sup> according to EN 60904-1.

### Electrical Parameters at NOCT<sup>2</sup>

Parameter	247.9	249.7	251.5	253.3	255.2	257.0	258.8	260.6	262.4	264.3	266.1
Power (W)	247.9	249.7	251.5	253.3	255.2	257.0	258.8	260.6	262.4	264.3	266.1
$V@P_{max}$ (V)	27.69	27.72	27.75	27.77	27.80	27.83	27.86	27.88	27.91	27.94	27.96
$I@P_{max}$ (A)	8.16	8.21	8.27	8.32	8.37	8.42	8.48	8.53	8.58	8.63	8.68
$V_{oc}$ (V)	37.66	37.72	37.77	37.85	37.96	37.91	37.97	38.09	38.17	38.20	38.26
$I_{sc}$ (A)	8.70	8.76	8.82	8.89	8.95	9.01	9.07	9.14	9.20	9.26	9.33


<sup>2</sup> NOCT irradiance 800 W/m<sup>2</sup>, ambient temperature 20°C, wind speed 1 m/sec

### Temperature Coefficients (Tc)


permissible operating conditions

Tc of Open Circuit Voltage ( $\beta$ )	- 0.29%/°C
Tc of Short Circuit Current ( $\alpha$ )	0.053%/°C
Tc of Power ( $\gamma$ )	-0.39%/°C
Maximum System Voltage	1500 V
NOCT	45°C ± 2°C
Temperature Range	-40°C to + 85°C

### Typical I-V Curves

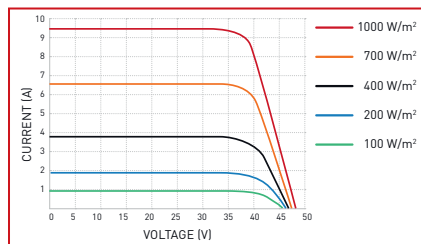

### Dimensions in mm

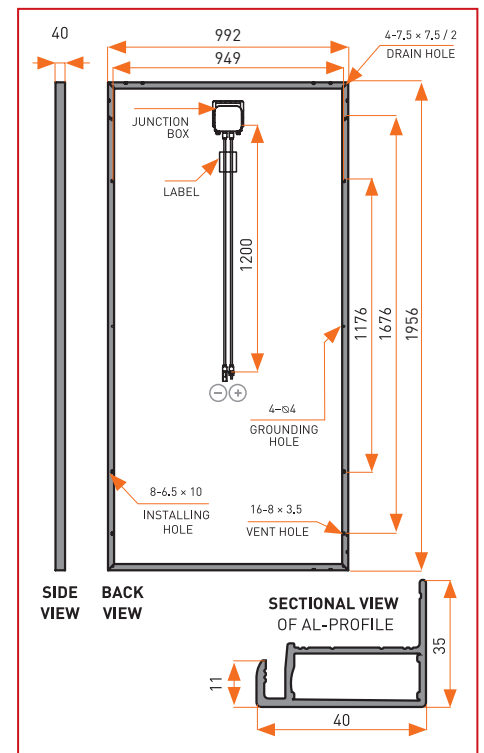

### Mechanical Data

Length x Width x Height	1956 x 992 x 40 mm (77.01 x 39.06 x 1.57 inches)
Weight	27 kg (59.52 lbs)
Junction Box	IP68/IP67, 3 Bypass diodes
Cable & Connectors	1200 mm (47.24 inches) length cables, MC4 Compatible/MC4 Connectors
Application Class	Class A (Safety class II)
Superstrate	4 mm (0.16 inches) high transmission low iron tempered glass, AR coated
Cells	72 Monocrystalline solar cells
Cell Encapsulant	EVA (Ethylene Vinyl Acetate)
Back Sheet	Composite film
Frame	Anodized aluminium frame with twin wall profile
Mechanical Load Test	5400 Pa
Maximum Series Fuse Rating	15 A


### Warranty and Certifications

Product Warranty**	10 years
Performance Warranty**	Linear Power Warranty for 27 years with 3% for 1st year degradation and 0.65% from year 2 to year 27
Approvals and Certificates	IEC 61215 Ed2, IEC 61730, IEC 61701, IEC 62716, UL 1703, MCS*, CEC*, PV Cycle*, CEC (Australia)*, JET*, IEC 62804

### Packaging Information

Quantity /Pallet: 25	Pallets/Container (40'HC): 24	Quantity/Container (40'HC): 600
----------------------	-------------------------------	---------------------------------

### Performance Warranty

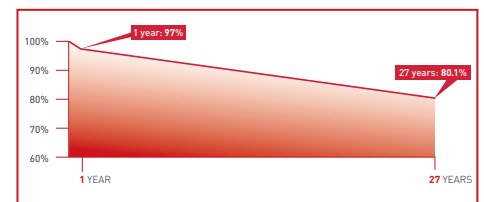

\* All (\*) certifications under progress.

\*\* Refer to Vikram Solar's warranty document for terms and conditions.

**CAUTION:** READ SAFETY AND INSTALLATION MANUAL BEFORE USING THE PRODUCT.

Specifications included in this datasheet are subject to change without notice. Electrical data without guarantee. Please confirm your exact requirement with the company representative while placing your order.